



**EMERGENCY<sup>®</sup>**  
**SOLUTIONS**



*Versatility  
to match costumers needs...*

[www.emergencysolutions.it](http://www.emergencysolutions.it)

E-Mail: [sales@emergencysolutions.com](mailto:sales@emergencysolutions.com)

SP 37 Delle Volte Basse, 42

Italy 53018 Sovicille (SI)

Tel: +39 0577 392234

***AUTOMATIC LIFTING SYSTEM***

*Technology to load and unload  
your ISO containers and put them  
on a secure footing.*






**Model:**  
**TE 101 281 A**

Customizable Input Voltage  
Standard 220 V / 240 V  
Frequency: 50 - 60 Hz  
Power: 3.5 Kw  
Temperature Range: -10°C +55°C

**GENERAL PARAMETERS:**

- a.** Maximum lifting height 1750mm
- b.** Locking into long side container ISO-corners\* no extra part to be fixed
- c.** Antirust for immersion and polyurethane spray painting. RAL 1019
- d.** arms for container height 2591mm
- e.** Foot plates 500mm x 500mm, connecting with movable ball shafts,
- f.** Distance driver compartment / container: > 670mm
- g.** Distance from the container 405mm
- h.** Elevating around 4 minutes 10Ton 2. 5 minutes 2Ton

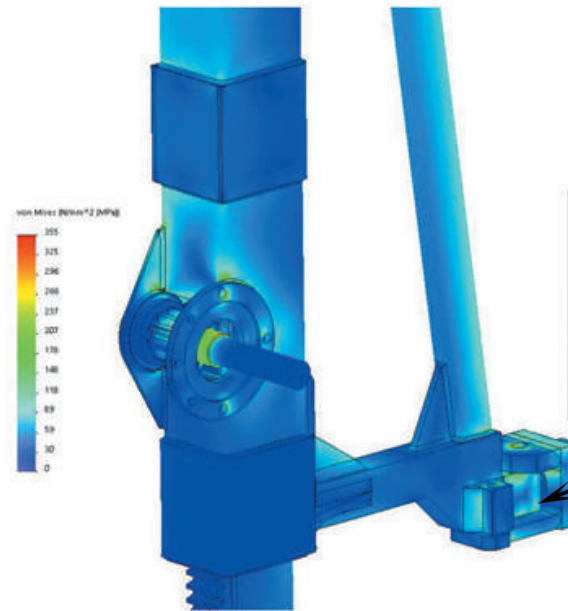

The columns can be locked to the container into short or long-side through standard iso corners system in both cases no extra parts are needed thanks to our property design.

We can suggest as option manual winch, maximum loading 150 kg to be used to elevate and mount lifting system without other mechanical tools. Mount and dismount the lifting system is allowed without any effort, with only 2 operator.

